# Green Infrastructure and Low Impact Development Evaluation and Implementation Plan

# **Final Report**

# Prepared for the Town of Ogden, NY

# November 2011





# **PROJECT MANAGER**

**Genesee/Finger Lakes Regional Planning Council** 

50 West Main Street, Suite 8107 Rochester, NY 14614 www.gflrpc.org

Brian C. Slack, AICP – Senior Planner Jayme Breschard – Senior Planner David S. Zorn – Executive Director

# **PROJECT CONSULTANT**

**Stearns and Wheler GHD** One Remington Park Drive Cazenovia, NY 13035

Gregory S. Liberman, CPESC – Environmental Designer John J. Lagorga, P.E., BCEE – Senior Project Manager, Infrastructure Liz Moran, Ph.D., EcoLogic, LLC

This project has been funded by the American Recovery and Reinvestment Act with support from the New York State Department of Environmental Conservation and New York State Economic Recovery and Reinvestment Cabinet. For more information, please visit: www.recovery.gov, www.dec.ny.gov or www.recovery.ny.gov.



# **Project Background**

An Overview of the Green Infrastructure and Low Impact Development Planning Project

In 2009 Genesee/Finger Lakes Regional Planning Council was awarded funding for regional comprehensive water quality management planning activities as described in Section 604(b) of the Clean Water Act. This project was funded from the New York State Department of Environmental Conservation's appropriations from the American Recovery and Reinvestment Act (ARRA). A full description of 604(b) ARRA awards and project requirements can be found on the NYSDEC website at the following address: http://www.dec.ny.gov/lands/58603.html.

The purpose of this *Genesee-Finger Lakes Green Infrastructure and Low Impact Development Evaluation* project was to produce a reliable inventory and assessment of potential stormwater "green infrastructure" retrofit projects within selected municipalities and to provide an assessment of the local regulatory framework to ensure compatibility with Low Impact Development (LID) practices. The following white paper summarizes the results of this inventory and assessment process.

This information can be used to help plan for local stormwater needs, meet existing stormwater regulations or water quality goals, and apply for implementation funds if and when they become available. To date, several municipalities – including the Town of Parma and the Villages of LeRoy and Penn Yan – have used the findings of this study to apply for funds made available through the NYS Environmental Facilities Corporation Green Innovation Grants program.<sup>1</sup>

A total of 9 municipalities in the Genesee-Finger Lakes region were selected to participate in this project. Project staff conducted field visits in these municipalities in the spring and summer of 2011 to identify and assess potential locations for green infrastructure stormwater facilities utilizing a standard approach created by the Center for Watershed Protection (CWP).<sup>2</sup> During that same time staff also assessed the body of local regulations within each project municipality utilizing the Center for Watershed Protection's Code and Ordinance Worksheet.<sup>3</sup>

This paper includes a brief explanation of the concepts of stormwater green infrastructure and Low Impact Development followed by a summary of the findings of this project relevant to the Town of Ogden. These findings are intended for use by the Town of Ogden and other project municipalities as they see fit.

**Stormwater Retrofits** 

are stormwater management practices in locations where stormwater controls did not previously exist or were ineffective.

### Green Infrastructure

management approaches and technologies infiltrate, evapotranspire, capture and reuse stormwater to maintain or restore natural hydrologies.

<sup>&</sup>lt;sup>1</sup> NYSEFC Green Grants. http://www.nysefc.org/GreenGrants.aspx

<sup>&</sup>lt;sup>2</sup> CWP's "Retrofit Reconnaissance Investigation" forms identified in Manual 3 of CWPs Urban Subwatershed

*Restoration Manual Series* http://www.cwp.org/categoryblog/92-urban-subwatershed-restoration-manual-series.html <sup>3</sup> CWP's "Codes and Ordinances Worksheet," available online at the following address

http://www.cwp.org/documents/cat\_view/77-better-site-design-publications.html

# **Project Background**

An Overview of the Green Infrastructure and Low Impact Development Planning Project



#### What is Stormwater Green Infrastructure?

#### Why It Matters: An Excerpt from <u>Managing Wet Weather with Green Infrastructure</u> – US EPA<sup>1</sup>

Existing development, especially in urbanized and urbanizing areas, is responsible for currently degraded water quality and stream conditions. Changes in land cover and the increased imperviousness of the urban environment have resulted in larger volumes of runoff traveling at faster velocities. This has caused serious streambank erosion and has compromised aquatic habitat. Many of these areas were developed without adequate stormwater controls and must be addressed if urban streams are to be restored and water quality is to be improved.

Retrofits to stormwater infrastructure will be necessary to reduce runoff and pollution, but the capital investment is daunting. Upgrades to stormwater and combined sewer systems, like other utilities, are capital-intensive projects. The EPA has estimated that current wastewater infrastructure requires an investment in excess of \$200 billion, with \$10 billion needed for stormwater management and \$60 billion needed for combined sewer overflow (CSO) correction. While this needed investment presents a significant economic burden, it also presents an opportunity to re-evaluate the most efficient way to invest in infrastructure and environmental programs.

Using green infrastructure for urban stormwater retrofits can reduce stormwater pollution while simultaneously reducing the burden and demand on existing infrastructure. However, water quality and quantity benefits are not the only advantages green infrastructure has to offer. Green infrastructure enhances communities by bringing aspects of the natural environment into inhabited space. Trees provide shade, act as wind breaks and noise barriers, and improve air quality. In many instances, green infrastructure has been found to be less costly than or cost-competitive with traditional infrastructure. Green infrastructure provides additional environmental and economic benefits for the investment rather than traditional stormwater management approaches that literally bury the investments out of sight. The additional benefits that green infrastructure provides include:

- Green infrastructure effectively counteracts urban heat island by substituting soils and vegetation for hard, heat absorbing materials common in urban areas, creating shade, and emitting water vapor.
- Green roofs and other vegetation incorporated on and around buildings, help shade and insulate buildings from wide temperature swings, decreasing the energy needed for heating and cooling.
- Green infrastructure improves air quality as vegetation absorbs gaseous air pollutants and absorbs particulates.
- Research indicates that property values increase when street trees are planted and vacant lots are greened, providing private benefits to homeowners, increased property tax revenue, and more livable communities.

The distributed green infrastructure network is designed to limit the conversion of precipitation to runoff by capturing rainwater where it falls, managing stormwater at the surface, and maximizing soil and vegetation contact during treatment. This combination allows green infrastructure to reduce stormwater volumes, peak flow rates, and pollutant concentrations.

Stormwater green infrastructure facilities work through a combination of

- Encouraging the infiltration of stormwater into the ground
- Encouraging evapotranspiration of stormwater through increased vegetation, and
- Capture and use

#### What is Stormwater Green Infrastructure?

#### Why It Matters

Green infrastructure is implemented through a variety of specific applications, including:

- Bioretention and Vegetated Swales
- Porous or Pervious Concrete and Asphalt and Permeable Block Pavers
- Rain Gardens
- Trees and Expanded Tree Boxes
- Reforestation and Canopy Restoration
- "Green Streets" which incorporate many of the above practices into one linear streetscape
- Green Roofs, Cisterns and Rain Barrels installed in individual homes and businesses

#### What is Low Impact Development (LID)?

Green infrastructure also includes better construction and design practices within new residential and commercial developments. This concept is explained through the comprehensive approach to development known as *Low Impact Development*.

Low Impact Development (LID) is an ecologically-friendly approach to site development and storm water management that aims to mitigate development impacts to land, water, and air. The approach emphasizes the integration of site design and planning techniques that conserve natural systems and hydrologic functions on a site. The practice has been successfully integrated into many municipal development codes and storm water management ordinances throughout the United States. Specifically, LID aims to:

- Preserve open space and minimize land disturbance
- Protect natural systems and processes (drainage ways, vegetation, soils, sensitive areas)
- Reexamine the use and sizing of traditional site infrastructure (lots, streets, curbs, gutters, sidewalks) and customize site design to each site (known as *Better Site Design*)
- Incorporate natural site elements (wetlands, stream corridors, mature forests) as design elements
- Decentralize and micromanage storm water at its source<sup>4</sup>

*Better site design* (BSD) is a means of implementing Low Impact Development. BSD incorporates nonstructural and natural approaches to new and redevelopment projects to reduce effects on watersheds by *conserving natural areas, reducing impervious cover* and *better integrating stormwater treatment*. Conventional design can be viewed as the style of suburban development that has evolved during the past 50 years and generally involves larger lot development, clearing and grading of significant portions of a site, wider streets and larger cul-de-sacs, enclosed drainage systems for stormwater conveyance and large "hole-in-the-ground" detention basins. The aim of better site design is to reduce the environmental "footprint" of the site while retaining and enhancing the owner/developer's purpose and vision for the site.<sup>5</sup>



For further information regarding the concepts mentioned above, visit the *G/FLRPC Green Infrastructure Resource Guide*, available online at <a href="http://www.gflrpc.org/GreenInfrastructureResourceGuide.htm">http://www.gflrpc.org/GreenInfrastructureResourceGuide.htm</a>

<sup>&</sup>lt;sup>4</sup> Summary on LID taken from the Low Impact Development Center's pamphlet *Municipal Guide to Low Impact Development*. http://www.lowimpactdevelopment.org/lid%20articles/Municipal LID.pdf

<sup>&</sup>lt;sup>5</sup> Summary on BSD taken from the NYSDEC Division of Water's guidebook *Better Site Design*.

http://www.dec.ny.gov/docs/water\_pdf/bsdcomplete.pdf

This paper separates the findings for the Town of Ogden into two sections: *Stormwater Retrofit Reconnaissance Results* and *Code and Ordinance Assessment Results*.

#### Stormwater Retrofit Reconnaissance Results

The following are the results of an assessment of potential green infrastructure demonstration and/or retrofit projects found within Ogden. This list is not comprehensive in scope; the number of potential retrofit projects that can be found within any given municipality are virtually limitless. This assessment focused on specific stormwater goals that were discussed in advance, including:

- Reduction of pollutants to Northrup Creek, which feeds Greece Ponds, a 303(d) waterbody
- Continued compliance with Phase II regulations
- Local demonstration projects to educate Highway Dept. staff and the public on the design and function of green infrastructure stormwater facilities

A total of 25 potential projects were identified across the 9 project municipalities; two sites were initially identified in Ogden which was later narrowed down to one site.

The following locations were identified in the initial consultation between G/FLRPC staff and Town staff:

- 1. Ogden Town Highway Garage
- 2. Maida Drive

After sites were identified, the project consultant – Stearns and Wheler GHD – performed the majority of technical analysis associated with green infrastructure retrofit design.

GHD conducted rapid field reconnaissance for each site listed above in order to gauge feasibility and then develop conceptual retrofit design sketches for the most feasible sites. In addition, GHD evaluated likely construction costs and the potential water quality benefits of each project, as well as other factors which may impact decision-making relative to the eventual construction of these facilities. Other factors include constructability, proximity to impaired waters, and other benefits, such as public education, diverting stormwater from municipal/private infrastructure, wildlife habitat, and flood storage capacity.

The assessment of individual sites includes a basic overview of site conditions, probable construction cost estimates, and conceptual plans of potential green infrastructure facilities.

Stormwater Retrofit Reconnaissance Results

Each proposed retrofit project was assessed for water quality and other benefits. A total of six criteria were used to assess and evaluate these projects:

- 1. Nutrient Removal
- 2. Total Suspended Solids (TSS) Removal
- 3. Nutrient Export to Impaired Waters (TP Total Phosphorous; TN Total Nitrogen)
- 4. Constructability/Maintenance
- 5. Probable Construction Costs
- 6. Other Unique Benefits

The key criteria are based on improvements to water quality and are similar to factors outlined in the U.S. Army Corps of Engineering, Wetland Functions and Values Assessments (1999). These include Nutrient Removal, Total Suspended Solids (TSS) Removal, and Nutrient Export to Impaired Waters. The other factors affect the potential implementation of these practices and include Constructability, Probable Construction Costs, and Other Unique Benefits.

#### The following is a description of the criteria used in this assessment.

1. Nutrient Removal. Based on Simple Method assessment of existing conditions (land-use, acreage, and rainfall) and treatment practice removal rates, as presented in Table A.4 of the NYS Stormwater Management Design Manual resulting in an estimated lbs/year of nutrients removed. It should be noted that these data were developed from conceptual sketches prepared using field measurements and are intended for planning purposes only.

Based on the assessment of the conceptual designs, each site was given a relative score of High, Moderate, or Low according to the following:

- High TP removed was greater than 2.0 lbs/year
- Moderate TP removed ranged from 1.0 1.9 lbs/year
- Low TP removed was less than 1.0 lbs/year

**2. TSS Removal.** Based on Simple Method assessment of existing conditions (land-use, acreage, and rainfall) and treatment practice removal rates outlined in Table A4 of the NYS Stormwater Management Design Manual resulting in an **estimated lbs/year of TSS removed**. It should be noted that these data were developed from conceptual sketches prepared using field measurements and are intended for planning purposed only.

Based on the assessment of the conceptual designs, each site was given a relative TSS removal score of High, Moderate, or Low according to the following:

- High TSS removed was greater than 500 lbs/year
- Moderate TP removed ranged from 100 to 499 lbs/year
- Low TP removed was less than 100 lbs/year

3. Nutrient Export to Impaired Waters. Evaluated a project site's proximity to an impaired or sensitive water body. Impaired waters were determined based on a review of the NYS 303 (d) and 305 (b) lists. For this project, impaired waters include the Rochester Embayment of Lake Ontario and Greece

Stormwater Retrofit Reconnaissance Results

Ponds (Buck Pond, Long Pond and Cranberry Pond). Northrup Creek is a tributary to these waterbodies. For this project, sensitive water bodies include **NYSDEC regulated wetlands**.

Each site was given a relative score of High, Moderate, or Low based on proximity to impaired waters.

- High Direct discharge to impaired waters
- Moderate Potential discharge to impaired water or direct discharge to tributary of impaired waters
- Low No direct connection to impaired waters

**4. Constructability/Maintenance**. Evaluated for the potential "constructability" for each retrofit project, as well as the anticipated long-term operations and maintenance requirements. For example, a small rain garden was considered to have somewhat simple construction (**High**), whereas a large wetland complex was considered to require engineering design, permitting, and long period of construction (**Low**). Each site was given a relative score of High, Moderate, or Low based on our assessment of the potential upfront engineering and permitting efforts, as well as anticipated complexity of construction and need for the long-term maintenance.

- High Required significant engineering/permitting, as well as complex construction and significant O&M
- Moderate Limited upfront engineering or permitting with some construction complexities, such as limited space
- Low Little anticipated need for upfront engineering/permitting, simple construction with limited long-term O&M

**5. Probable Construction Costs.** Established unit costs for each type of retrofit practice based on published sources, such as the NYS Stormwater Management Design Manual (2008 and 2010). The probable construction cost was calculated by multiplying the unit costs by the conceptual size of the practice. Some minor variation of unit costs were taken into account based on project complexities. Probable construction costs were used to develop Cost per Pound of Nutrient (TN and TP) Removed and Cost per Pound of TSS Removed. It should be noted that probable construction costs were developed based on conceptual sketches and may fluctuate based on final site specific circumstances or other various factors. These costs are intended for planning purpose only.

The cost per pound of TN and TP removed per year varied based on project size and type. For the projects within this study, relative scores of High, Moderate, and Low were derived based on the ranges of costs as follows:

- High Cost per pound of total nutrients (TN and TP) is less than \$5,000
- Moderate Cost per pound of total nutrients (TN and TP) is between \$5,000 and \$15,000
- Low Cost per pound of total nutrients (TN and TP) is greater than \$15,000

**6. Other Unique Benefits.** Local and regional water quality is at the core of this project. However, many of the proposed retrofit projects result in additional benefits beyond water quality improvements. These include opportunities for public education, diversion of stormwater from municipal/private infrastructure, enhanced wildlife habitat, and flood storage capacity.

These other benefits were given relative scores of High, Moderate, and Low based on the following:

• High – Direct potential for other benefits, such as sites located within parks

Stormwater Retrofit Reconnaissance Results

- Moderate Potential for other benefits, such as improved wildlife habitat or improved aesthetics
- Low Limited or no potential for other benefits beyond water quality improvements

#### Conceptual Stormwater Retrofit Plans

Each stormwater retrofit design is documented on the attached *Conceptual Stormwater Retrofit Plans*. In addition, the benefits of each project are documented in the attached *Benefit Assessment Worksheet*.

In addition to the plans and worksheets, the retrofit projects were qualitatively ranked relative to one another, and this information is attached in the *Qualitative Assessment Table* (QAT). It is important to note that the scoring in the QAT is relative to the retrofit projects in this assessment only. Further, these retrofit projects, regardless of score, all provide water quality and other unique benefits.

GHD has developed the conceptual design plans and has assessed each site based upon the above reference criteria. Based on our review, it appears the proposed projects can be divided into three categories based on type of stormwater practice: Filtration Practices (bioretention, rain gardens, bioswales), Stabilization (outlet protection, bank stabilization) and Stormwater Ponds/Wetlands. These types of practices vary significantly in terms of construction costs, engineering requirements, and water quality improvements. While each of these projects has a direct water quality permitting benefit and should be evaluated as part each municipality's long-term plan, some general distinctions about each group can be made.

It appears that filtration practices generally have the lowest cost per pound of nutrients removed with the cost per pound of nutrients (TN and TP) removed per year combined generally less than \$3,800. The stabilization projects appear to be the most cost effective at reducing TSS with the cost per pound of TSS removed typically below \$10. These stabilization practices also appear effective at preventing nutrient loading due to the significant level of anticipated soil stabilization. Also, large-scale stabilization project can be an efficient method of nutrient removal. While stormwater ponds and wetland do not have the lowest cost per pound of nutrients or TSS removed, these practices do allow for the most quantity of nutrient and TSS to be removed annually. For example, the least efficient stormwater wetland in this study is anticipated to remove more than 3 lbs of TP and 18 lbs of TN per year. This is far greater than the majority of the smaller scale filtration practices and should be considered when reviewing the entirety of these projects. Similarly, smaller projects, such as rain gardens around public buildings, have an aesthetic benefit and can be used to educate and engage the public.

Two initial sites were narrowed down to the following high-value site:

1. Maida Drive Stormwater Easement. The Town of Ogden has a stormwater easement over multiple acres adjacent to Northrup Creek directly south of the vacant Ogden Wastewater Treatment Plant. This area is comprised of a wooded and open meadow areas. A small drainage ditch transects this easement as well. This portion of the Creek is largely untreated runoff from a predominantly developed (paved) upstream watershed.

The purpose of the retrofit is to construct a stormwater wetland system adjacent to the Creek to provide low-flow water quality treatment for a portion of diverted flow from Northrup Creek. The system would require a low flow diversion from the west bank of Northrup Creek. This could be as simple as a 12-inch diameter inlet pipe set at a low flow elevation near bankfull elevation. Flow from the system would meander through a constructed two-acre wetland allowing for biological uptake of nutrients and sediment deposition. A controlled outlet structure would be located at the end of wetland system discharging back to the creek. In addition to water quality improvement, the wetland system would provide opportunity for habitat and potential flood storage.



# Ogden – Maida Drive Wetland

Benefit Assessment Worksheet

The purpose of the retrofit is to construct a stormwater wetland system adjacent to Northrup Creek to provide water quality treatment for a portion of diverted flow from Northrup Creek. The system would require a low flow diversion, meandering wetland complex and controlled outlet structure discharging flow back into the Creek. In addition to water quality, the wetland system would provide opportunity for habitat and potential flood storage.



## **Nutrient Removal**

Nutrient loading based on a percentage of watershed, correlated to size of low-flow diversion. Baseline TN and TP are approximately 63.0 and 6.3 lbs/year, respectively. Anticipating 30 percent and 50 percent removal rate based on a stormwater wetland system, the **estimated pounds of TN and TP removed per year is 19.0 and 3.0**, respectively.



### **TSS Removal**

TSS loading based on a percentage of watershed correlated to size of low-flow diversion. Baseline TSS for this site is approximately 860 lbs/year. Anticipating 80 percent removal rate based on a wetland system, the **estimated pounds of TSS removed per year is 685.** 



### **Nutrient Export To Impaired Waters**

The project site is directly adjacent to Northrup Creek. While this stream has been stressed from development, it is not listed as an impaired water; it does, however, drain to the Greece Ponds (Long Pond specifically), which are listed as an impaired water.



### **Constructability/Maintenance**

The construction of the stormwater wetland at Maida Drive will require significant engineering and permitting prior to construction. Also, the project requires flow-diversions, structures, and extensive earthwork. Because of this, the constructability for this practice is considered **Low.** In addition, the project is likely to require significant long-term maintenance and monitoring.




### **Probable Construction Costs**

A unit value of \$10 per square foot for a stormwater wetland within the an open area was multiplied by the conceptual size of the retrofit practice (80,000 square feet) for a probable construction cost of \$800,000. This results in an anticipated **cost per Pound of nutrients (TN and TP) removed of \$36,000** and **Cost per Pound of TSS removed of \$1,100**.



#### **Other Benefits**

In addition to water quality improvement, this project could also provide for **enhanced wildlife** habitat and additional flood storage.

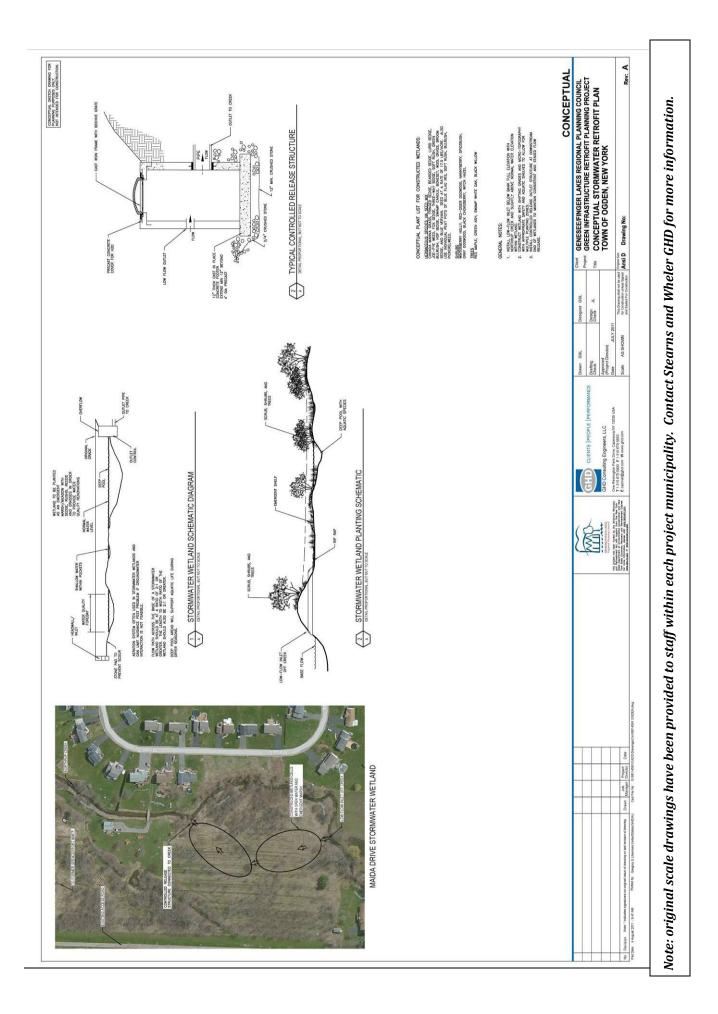

Code and Ordinances Worksheet Findings

Each project municipality's body of local laws and ordinances was reviewed utilizing the Center for Watershed Protection's (CWP) *Code and Ordinance Worksheet*. On average, most municipalities scored between 60 and 70 points out of 100 points, which denotes that opportunities exist to improve development rules in order to protect local aquatic resources in addition to the benefit of creating a site planning roundtable. Such a roundtable is described as a consensus process to encourage board members to make better choices in the design of their community. The primary tasks of a local roundtable are to systematically review existing development rules in the context of the model development principles, and then determine if changes can or should be made to the rules.

Genesee/Finger Lakes Regional Planning Council (G/FLRPC) collaborated with other regional entities, including the Stormwater Coalition of Monroe County, to identify the best methodology to use for this analysis. The CWP's *Code and Ordinance Worksheet* was selected due to its focus on the specific issue of local laws – namely, zoning, site plan review and subdivision law. The 77 site planning questions posed in the *Code and Ordinance Worksheet* are awarded specific points if the municipality's local law compares favorably with the benchmark.

Based on the 22 sections of the *Code and Ordinance Worksheet*, three major documents were necessary to fully complete it: the municipality's zoning ordinance, subdivision code, and design and construction criteria. In some cases, if the municipality is a regulated Municipal Separate Storm Sewer System (MS4), an erosion and sediment control ordinance and/or stormwater management ordinance was also reviewed.

The process established to complete the *Code and Ordinance Worksheet* was composed of two phases: the first phase allowed staff at G/FLRPC to complete the worksheet using the municipality's applicable local laws. The reviewer then sent this draft to the municipality's designated point-of-contact. The municipality then had the opportunity to review this draft before a meeting was set-up between the reviewer and the municipality. The dialogue between the reviewer and municipality was valuable in that many inconsistencies were found throughout the *Code and Ordinance Worksheet*.

The *Code and Ordinance Worksheet* clearly states that the reviewer "must identify the local, state, and federal authorities that actually administer or enforce the development rules within your community." Municipal staff that interact daily with these development rules are significantly more aware of these rules than the reviewer. Municipal staff readily pointed out to the reviewer where inconsistencies could be found. For example:

- Dead-end fire apparatus access roads in excess of 150 feet must provide width and turnaround provisions in accordance with Table D103.4 of the New York State Fire Code. In this case, a cul-de-sac must have a 96-foot-diameter. In Section 4: Cul-de-Sacs, the *Code and Ordinance Worksheet* awards 3 points for a radius less than 35 feet and 1 point for an answer between 36 feet and 45 feet. Neither benchmark corresponds with the 48-foot-radius minimum requirement according to D103.4: Dead ends of the New York State Fire Code.
- According to 511.2.1: Dimensions of the New York State Fire Code, driveways must provide a minimum unobstructed width of 12 feet. Section 14: Driveways of the *Code and Ordinance Worksheet* awards one point only if the answer is below 9 feet.
- Fire apparatus access roads must also have an unobstructed width of not less than 20 feet, except for approved security gates, according to 503.2.1: Dimensions. Therefore, the benchmark set

Code and Ordinances Worksheet Findings

for 18 to 22 feet for Section 1: Street Width of the *Code and Ordinance Worksheet* does not necessarily comply.

Another area of discrepancy is Section 13: Sidewalks of the *Code and Ordinance Worksheet* with the Americans with Disabilities Act (ADA). State and local government facilities must follow the 2010 Standards for Accessible Design as of March 15, 2012. Before that date, the 1991 Standards or the Uniform Federal Accessibility Standards (UFAS) were used for projects.

An accessible route is defined in Chapter 4 of the 2010 Standards as one or more of the following components: a walking surface with a running slope not steeper than 1:20, doorways, ramps, curb ramps excluding the flared sides, elevators, and platform lifts. The clear width of walking surfaces can be 36 inches. However, if a clear width less than 60 inches is provided, passing spaces must be made available at intervals of 200 feet. Passing spaces can be either 60 inches minimum by 60 inches or an intersection of two walking surfaces providing a T-shaped space where the base and arms of the T-shaped space extend 48 inches beyond the intersection. The 1991 Standards states the minimum clear width for single wheelchair passage is 32 inches at a point and 36 inches continuous with a 60 inch minimum width for two wheelchairs to pass. The minimum clear width of an accessible route as defined by UFAS is 36 inches in width. The *Code and Ordinance Worksheet* awards two points for a minimum width of 4 feet or less allowed in the community.

One final discrepancy in the *Code and Ordinance Worksheet* can be found in Section 8: Parking Lots regarding the minimum stall width and length for a standard parking space. The *Manual on Uniform Traffic Control Devices* (MUTCD) is published and has been administered by the Federal Highway Administration (FHWA) since 1971. The manual is a compilation of national standards for traffic control devices installed and maintained on all public streets, highways, bikeways, and private roads open to public traffic. It is updated periodically to address changing transportation needs in the nation. The MUTCD became effective in New York State on January 15, 2010 with a NYS Supplement adopted on March 16, 2010. In this manual, a typical parking space is recommended to be 8 feet wide by 22 to 26 feet in length and an end space as 8 feet by 20 feet. The *Code and Ordinance Worksheet* awards one point for a stall width less than 9 feet and one point for a stall length less than 18 feet.

Overall, most municipalities scored between 60 and 70 points out of a total 100. Several municipalities scored below 60 points, which states that "serious reform of the development rules is needed." A score of 90 to 100 states that the community is "a real leader in protecting streams, lakes, and estuaries." A score of 60 to 69 and 70 to 79 basically states the community doesn't have adequate development rules to protect local aquatic resources and that significant opportunities exist. There were three questions that none of the municipalities scored any points on:

- At higher densities are parking lanes allowed to serve as traffic lanes (i.e., queuing streets). (Section 1: Street Width, 3 points available)
- If mass transit is provided nearby, is the parking ratio reduced? (Section 7: Parking Codes, 1 point available)
- Are there any incentives to developers to provide parking within garages rather than surface parking lots? (Section 9: Structured Parking, 1 point available)

As these questions seem "non-applicable," they should be considered for removal from the *Code and Ordinance Worksheet* and total maximum points awarded to each municipality.

Another generalization about the *Code and Ordinance Worksheet* applies when dealing with a historic community versus contemporary ones. The Village of Spencerport, Le Roy, Penn Yan, Churchville and Dryden experienced growth and development much earlier than most towns participating in the local law analysis. A good deal of the land available in these villages has already been built upon; thus, street widths and lengths and lot setbacks and frontages have already been determined. These villages were also developed long before zoning and other standards and ordinances existed. The Towns of Ogden, Parma, Walworth and Webster are currently experiencing population growth due to suburban expansion. There are more opportunities with current regulatory processes to encourage low-impact design and development in these municipalities. Hence, the *Code and Ordinance Worksheet* may provide more opportunities for growing communities to score higher with new construction as opposed to historic communities with existing footprints. In this case, a scoring methodology that considers more retrofit-friendly frameworks, regulatory structures, and incentive programs is recommended in future reviews for historic communities.

Finally, each municipality discovered different strengths, weaknesses, and areas of opportunity through the *Code and Ordinance Worksheet* process. They are as follows:

#### Town of Ogden

Total: 60

### Strengths:

- Section 11: Open Space Design
- Section 15: Open Space Management
- Section 17: Buffer Systems
- Section 20: Tree Conservation
- Section 21: Land Conservation Incentives
- Section 22: Stormwater Outfalls

#### Weaknesses:

- Section 6: Parking Ratios
- Section 8: Parking Lots
- Section 12: Setbacks and Frontages
- Section 18: Buffer Maintenance

#### **Areas of Opportunity**

• The volume of stormwater generated at parking lots could be reduced if the Town of Ogden required landscaping for off-street parking areas and reduced parking requirements to allow smaller spaces. Bioretention facilities, dry swales, perimeter sand filters, and filter strips are types of landscaped areas that provide stormwater management. These techniques could also enhance the appearance of parking lots and visually separate land uses or development.

Code and Ordinances Worksheet Findings

• Parking codes could also be amended to require that a fixed percentage (i.e. 15 to 30%) of all parking stalls be dedicated for compact cars. *Town of Ogden Comprehensive Plan* (February 2003) calls for the design and construction of pedestrian safety and convenience into all parking areas in addition to attractiveness of commercial areas through adequate landscaping and property maintenance in "Policy Area: Design and Development."

#### **Code and Ordinance Worksheets**

The following pages contain the summarized results of the CWP Code and Ordinance Worksheets. Those results are organized into the following major and minor categories:

#### • Residential Streets and Parking Lots

- o Street width and length
- Right of way width
- Cul-de-sacs
- Vegetated open channels
- Parking ratios
- Structured parking
- Parking codes
- Parking lots
- Parking lot runoff

#### • Lot Development

- Open space design
- Setbacks and frontages
- o Sidewalks
- o Driveways
- Open space management
- Rooftop runoff
- Conservation of Natural Areas
  - o Buffer systems
  - Buffer maintenance
  - Clearing and grading
  - Tree conservation
  - Land conservation
  - Stormwater outfalls

Areas found to be deficient with regard to stormwater green infrastructure or LID have been checked  $(\square)$  as "to be revised."

Where available, online resources have been cited under the "Notes" section and provide more information relevant to the category or subcategory. Interested readers should visit these resources to learn more about the issue and how their municipality can improve its local codes and operations therein.

Code and Ordinances Worksheet Findings

# **RESIDENTIAL STREETS AND PARKING LOTS**

	Is the minimum pavement width for low traffic residential streets (<500 average daily trips) between 18-22 ft.?	Score: 5 out of 8 points
	20  ft.	r
_	☑ Yes □ No Section: Town Design Criteria and Construction Standards □ No Standard	
gth	Action: $\square$ Leave as is $\square$ To be revised	
en	Notes:	
Ē		
pu	Can parking lanes serve as traffic lanes in higher density areas?	
n a	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
dtl	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
Wi	$\square$ Typically not allowed Action: $\square$ Leave as is $\square$ To be revised	
G	Notes:	
Street Width and Length	Are alternatives to minimize street length allowed where appropriate (i.e. cluster developments, around cul-de-sacs,	
	etc.)?	
<i>.</i>	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
and	□ Incentivized in code/ordinance	
. a	$\Box$ Typically not allowed Action: $\Box$ Leave as is $\Box$ To be revised	
-	Notes:	
	Is minimum ROW widths less than 45 ft. for a residential street? <u>60</u> ft.	Score: 0 out of 4 points
th	□ Yes 🗹 No Section: Town Design Criteria and Construction Standards	-
'id	Action: $\Box$ Leave as is $\square$ To be revised	
3	Notes: Right-of-Way Improvements Manual, City of Seattle, Washington. Available at:	
ay	http://www.seattle.gov/transportation/rowmanual.	
N.	Can utilities be placed below the paved section of the ROW?	-
of-	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
It-	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
Right-of-Way Width	$\square$ Typically not allowed Action: $\square$ Leave as is $\square$ To be revised	
R	Notes:	
Э.		

	Is the minimum required radius for cul-de-sacs less than 35 □ Yes ☑ No Section: Town Design Criteria and Construction		Score: 2 out of 5 points
	□ Tes E No Section. Town Design Chiena and Construction	Action: $\Box$ Leave as is $\checkmark$ To be revised	
	Notes: Impervious Surface Reduction: Cul-de-Sac Design, pre Company. Available at: <u>http://www.barr.com/clientre/Archive</u>	pared for the Metropolitan Council by Barr Engineering	
ŝ	Are landscaped or bioretention islands allowed in the cente		
Sac	□ Supportive language in code/ordinance Section:	□ Site specific with Planning Board approval	
6-0	□ Incentivized in code/ordinance	☑ Expressly allowed by design/construction specifications	
l-d	□ Typically not allowed	Action: $\square$ Leave as is $\square$ To be revised	
Cul-de-Sacs	Notes:		
4	Are alternatives to cul-de-sacs such as "hammerheads" allo	wed for permanent turnarounds?	-
	□ Supportive language in code/ordinance Section:	□ Site specific with Planning Board approval	
	□ Incentivized in code/ordinance	$\square$ Expressly allowed by design/construction specifications	
	□ Typically not allowed	Action: $\square$ Leave as is $\square$ To be revised	
	Notes:		
		<u> </u>	Second 2 and a C.A. wainte
els	Are curbs and gutters required for most residential streets ✓ Supportive language in code/ordinance Section: <u>167-6</u>	□ Site specific with Planning Board approval	Score: 2 out of 4 points
nn	□ Incentivized in code/ordinance	□ Expressly allowed by design/construction specifications	
ha	□ Typically not allowed	Action: $\Box$ Leave as is $\boxtimes$ To be revised	
1 C	Notes:		
per			
0			
Vegetated Open Channels	Are modified curb or gutter systems such as vegetated swal stormwater infiltration and evaporation?		
eta	$\square$ Supportive language in code/ordinance Section: <u>167-22</u>	□ Site specific with Planning Board approval	
eg	$\Box$ Supportive language in code/ordinance $\Box$ Section. <u>107 22</u>	□ Expressly allowed by design/construction specifications	
	□ Typically not allowed	Action: $\square$ Leave as is $\square$ To be revised	
5	Notes:		

		~
	Are the minimum required number of parking spaces less than:	Score: 1 out of 5 points
	3 spaces per 1,000 sq. ft. for professional office building? $\Box$ Yes $\boxtimes$ No Section: <u>210-75</u> $\Box$ No Standard	
	Action: $\Box$ Leave as is $\square$ To be revised	
	4.5 spaces per sq. ft. for shopping centers? $\Box$ Yes $\boxtimes$ No Section: <u>210-75</u> $\Box$ No Standard	
10.	Action: $\Box$ Leave as is $\square$ To be revised	
tat	2 spaces per single family home? $\square$ Yes $\square$ No Section: <u>210-75</u> $\square$ No Standard	
R R	Action: $\square$ Leave as is $\square$ To be revised	
ing	Notes: Assessing Street and Parking Design Standards to Reduce Excess Impervious Cover in New Hampshire and	
rk	Massachusetts, U.S. Environmental Protection Agency. Available at:	
Parking Ratios	http://www.epa.gov/region1/npdes/stormwater/assets/pdfs/ImperviousAssessment.pdf.	
.0	Are parking ratios expressed as both minimum and maximums?	
	$\square$ Yes $\square$ No, minimum only $\square$ No, maximum only $\square$ No, Expressed as medians Section: <u>210-75</u>	
	Action: $\Box$ Leave as is $\square$ To be revised	
	Notes:	
	Is the use of shared parking arrangements promoted?	Score: 1 out of 5 points
Parking	$\square$ Supportive language in code/ordinance Section: 210-72 (A) $\square$ Site specific with Planning Board approval	
ki.	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
ar	$\Box \text{ Typically not allowed} \qquad \qquad Action: \square \text{ Leave as is } \Box \text{ To be revised}$	
	Notes:	
pu		
50	Are model shared parking agreements provided?	
in	$\Box$ Yes $\boxtimes$ No Section: $\boxtimes$ Shared parking not allowed	
ss	$Action: \Box$ Leave as is $\square$ To be revised	
ed Park Codes	Notes: Model Shared Parking Agreements, Town of Clinton: Recommended Model Development Principles for Protection	
Ŭ Ġ	of Natural Resources in the Hudson River Estuary Watershed. Available at:	
ar	http://www.dec.ny.gov/docs/remediation_hudson_pdf/hrewbsdclin.pdf.	
nct	Are parking requirements reduced for shared parking arrangements, structured parking, areas near mass transit,	
Structured Parking and Codes	and special districts?	
<u>%</u>	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
<b>q</b> 8	$\Box$ Incentivized in code/ordinance $\Box$ Expressly allowed by design/construction specifications	
and	$\square$ Typically not allowed $Action: \square$ Leave as is $\square$ To be revised	
7. 8	Notes: Recommend inclusion with code/ordinance.	
L		

	Are minimum stall dimensions for standa	rd narking snaces 0 ft v 18	<b>6 ft. or less?</b> 10 <i>ft. x</i> 20	0 ft. Score: 2 out of 5 points
	$\square$ Yes $\square$ No Section: 210-72: Parking a			
	<u> </u>		Action: $\Box$ Leave as is $\square$ To be re	
	Notes:			
S	Are smaller compact car stalls required f	or at least 30% of total par	king spaces?	
Į O	□ Supportive language in code/ordinance		□ Site specific with Planning Board app	
မ	□ Incentivized in code/ordinance	$\Box$ Expr	essly allowed by design/construction specification	ations
kin (	☑ Typically not allowed		Action: $\Box$ Leave as is $\square$ To be re	vised
arl	Notes: Impervious Surface Reduction: Parl			
9. Parking Lots	http://www.metrocouncil.org/environment/		<u>king.pdf.</u>	
6	Can pervious materials be used for spillo			
	☑ Supportive language in code/ordinance	Section: <u>210-72</u>	☑ Site specific with Planning Board app	proval
	□ Incentivized in code/ordinance	$\Box$ Expr	essly allowed by design/construction specific	
	□ Typically not allowed	1.	Action: $\Box$ Leave as is $\square$ To be re-	evised
	Notes: Recommend inclusion with code/or	linance.		
	Does a minimum percentage of parking l	ots need to be landscaped?		Score: 4 out of 4 points
ŗ	☑ Supportive language in code/ordinance S		7-22 Site specific with Planning Board app	
lof	□ Incentivized in code/ordinance	□ Expre	essly allowed by design/construction specifica	
tur	□ Typically not allowed		Action: $\square$ Leave as is $\square$ To be re-	evised
t R	Notes:			
Lo				
Parking Lot Runoff	Are bioretention islands or vegetated filte			
rki	Are bioretention islands or vegetated filter strips allowed within landscaped areas of parking lots? ☑ Supportive language in code/ordinance Section: <u>210-49</u> , <u>167-6</u> , <u>&amp; 167-22</u> ☑ Site specific with Planning Board approva			proval
Pa	□ Incentivized in code/ordinance		essly allowed by design/construction specifica	
10.	□ Typically not allowed		Action: $\Box$ Leave as is $\square$ To be re	evised
-	Notes: Recommend inclusion with code/or	dinance.		
A	reas identified within Residential Streets an	nd Parking Lots that are me	ost in-line with Green Infrastructure princi	iples:
$\checkmark$	Street Width	Parking Ratios	☑ Street Length	□ Parking
_	odes			
_	Row Width	□ Parking Lots	□ Cul-de-Sacs	□ Structured Parking
	Vegetated Open Swales	☑ Parking Lot Runoff		

Code and Ordinances Worksheet Findings

# LOT DEVELOPMENT

	Are conservation subdivisions and/or cluster developments allowed?		Score: 7 out of 8 points
	☑ Supportive language in code/ordinance Section: <u>173-22</u> : Statutory provision	as and Chapter 211: Incentive Zoning	
	□ Site specific with Planning Board approval	☑ Incentivized in code/ordinance	
	Expressly allowed by design/construction specifications	$\Box$ Typically not allowed	
_		Action: $\square$ Leave as is $\square$ To be revised	
50	Notes:		
esi	Is water quality or land conservation a major goal?		
Ď	$\square$ Yes $\square$ No Section: <u>211-2</u> : <u>Purpose and intent</u>	□ No Standard	
ce	10 10 Section. <u>211 2. 1 upose and ment</u>	Action: $\Box$ Leave as is $\heartsuit$ To be revised	
11. Open Space Design	Notes: Recommend impervious cover reduction as a major goal for intent and		
S	Are the application requirements for conservation subdivisions and/or clus	č	
en	conventional developments?	ter developments greater than for	
op	□ Yes ☑ No Section: 211-8: Criteria and procedure for approval	□ No Standard	
	Tes E No Section. 211-6. Enteria and procedure for approval	Action: $\Box$ Leave as is $\square$ To be revised	
-	Notes:		
	Are conservation subdivisions and/or cluster developments permitted by zo	ming without a nublic hearing?	
	$\square$ Yes $\square$ No Section: <u>211-8</u> : Criteria and procedure for approval	$\square$ No Standard	
	1 res 🖻 No Section. 211-8. Chiena and procedure for approval	Action: $\Box$ Leave as is $\square$ To be revised	
	Notes:	Action. I Leave as is E 10 be revised	
	Are irregular lot shapes (i.e. pie-shaped, flag lots) allowed?		Score: 1 out of 6 points
ş	Supportive language in code/ordinance Section: 210-65		Score. I out of 6 points
eo O		□ Incentivized in code/ordinance	
nta	□ Site specific with Planning Board approval		
101	□ Expressly allowed by design/construction specifications	□ Typically not allowed	
Ē		Action: $\square$ Leave as is $\square$ To be revised	
Setbacks and Frontages	Notes:		
3 a	Are reductions in frontage distances allowed where appropriate to minimiz		
Sk	□ Supportive language in code/ordinance Section: <u>210-27: Residential Trans</u>		
Jac	□ Site specific with Planning Board approval	□ Incentivized in code/ordinance	
etł	Expressly allowed by design/construction specifications	✓ Typically not allowed	
S		Action: $\Box$ Leave as is $\boxdot$ To be revised	
12.	Notes: Best Development Practices Guidebook, Town of Franklin, Massachuse	etts. Available at:	
	http://franklinma.virtualtownhall.net/Pages/FranklinMA Planning/initiatives/bestdevelopment.pdf.		
L			1

	Are reductions in setback distances allowed where appropriate to minimize driveway lengths?	
	$\Box$ Supportive language in code/ordinance Section: 210-27: Residential Transition District (G)	
	□ Site specific with Planning Board approval □ Incentivized in code/ordinance	
	□ Expressly allowed by design/construction specifications	
	$Action: \Box$ Leave as is $\square$ To be revised	
	Notes:	
	Is the minimum required width for a sidewalk 4 ft. or less? 5 ft.	Score: 3 out of 6 points
	$\Box$ Yes $\blacksquare$ No Section: Town Design Criteria and Construction Standards $\Box$ No Standard	
	Action: $\square$ Leave as is $\square$ To be revised	
	Notes: Continue to adhere to ADA Accessibility Guidelines.	
	Are sidewalks allowed on only one side of the street?	
	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
70	□ Incentivized in code/ordinance	
Iks	$\Box$ Typically not allowed Action: $\overrightarrow{\Box}$ Leave as is $\Box$ To be revised	
Sidewalks	Notes:	
de	Are sidewalks sloped so that stormwater drains into the front yard as opposed to the street?	
S.	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
ω.	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
-	$\square$ Typically not allowed Action: $\square$ Leave as is $\square$ To be revised	
	Notes:	
	Are alternative pedestrian pathway layouts allowed, rather than placement in road ROW?	
	□ Supportive language in code/ordinance Section: ☑ Site specific with Planning Board approval	
	$\Box$ Incentivized in code/ordinance $\Box$ Expressly allowed by design/construction specifications	
	$\Box \text{ Typically not allowed} \qquad \qquad Action: \Box \text{ Leave as is } \boxdot \text{ To be revised}$	
	Notes: Recommend inclusion with code/ordinance.	
	Is the minimum driveway width 9 ft. or less (single lane) or 18 ft. (two lanes)?ftft.	Score: 4 out of 6 points
	$\Box$ Yes $\Box$ No Section: $\Box$ No Standard	
iys	Action: $\Box$ Leave as is $\square$ To be revised	
wa	Notes: Impervious Surface Reduction: Driveway Design, prepared for the Metropolitan Council by Barr Engineering	
14. Driveways	Company. Available at: <u>http://www.barr.com/clientre/Archives/BMPs/BMPfiles/04RPPImpDriveway.pdf</u> .	
Dri	Are alternative materials and designs (i.e. porous pavers, two-track design, etc.) allowed?	
<u> </u>	□ Supportive language in code/ordinance Section: □ Site specific with Planning Board approval	
14	$\Box \text{ Incentivized in code/ordinance} \qquad \Box \text{ Expressly allowed by design/construction specifications}$	
	$\Box \text{ Typically not allowed} \qquad \qquad Action: \Box \text{ Leave as is } \boxdot \text{ To be revised}$	
	Notes: Recommend inclusion with code/ordinance.	

	Are shared driveways allowed?         □ Supportive language in code/ordinance       □ Site specific with Planning Board approval         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Typically not allowed       Action: □ Leave as is ☑ To be revised         Notes:       Recommend inclusion with code/ordinance.         Does the community have requirements to allow homeowner associations or land trusts to manage open space?         ☑ Supportive language in code/ordinance Section:       Chapters 5 & 211         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Supportive language in code/ordinance       □ Expressly allowed by design/construction specifications         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Typically not allowed       Action: ☑ Leave as is □ To be revised         Notes:       □	Score: 6 out of 6 points
Management	Are conservation subdivisions and/or cluster developments located in close proximity required to consolidate their open space?         □ Supportive language in code/ordinance       Section:       ☑ Site specific with Planning Board approval         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Typically not allowed       Action: □ Leave as is ☑ To be revised         Notes:       Recommend inclusion with code/ordinance.	
15. Open Space Management	Does a minimum percentage of open space need to remain in its natural condition?         ✓ Supportive language in code/ordinance       Section: 210-27 and 210-26       □ Site specific with Planning Board approval         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Typically not allowed       Action: □ Leave as is ☑ To be revised         Notes: Recommend inclusion with code/ordinance.	
	Are uses for open space in residential developments defined?         ☑ Supportive language in code/ordinance       Section: 210-27 and 210-26       □ Site specific with Planning Board approval         □ Incentivized in code/ordinance       □ Expressly allowed by design/construction specifications         □ Typically not allowed       Action: □ Leave as is ☑ To be revised         Notes:       Recommend inclusion with code/ordinance.	

p Runoff	Can rooftop runoff be discharged to ☑ Supportive language in code/ordin □ Site specific with Planning Board ap □ Expressly allowed by design/constru- Notes:	ance Section: <u>167-22</u> pproval	□ Incentivized in code/ordinance □ Typically not allowed Action: ☑ Leave as is □ To be revised	Score: 2 out of 4 points
16. Rooftop Runoff	Is temporary ponding of stormwate Supportive language in code/ordina Site specific with Planning Board ap Expressly allowed by design/constru- Notes:	nce Section: <u>64-2: Prohibited acts (1</u> oproval		
Area	as identified within Lot Development	that are most in-line with Green Inf	rastructure principles:	
Ø	pen Space Design	☑ Driveways	Setbacks and Frontage	ges
₫ 0	pen Space Management	□ Sidewalks	Rooftop Runoff	

Code and Ordinances Worksheet Findings

# **CONSERVATION OF NATURAL AREAS**

	Is there an ordinance that provides for a river or stream buffer to pro-	otect water quality and habitat in streams and	Score: 4 out of 4 points
S	rivers? <u>120</u> ft.(minimum)		
	□ Supportive language in code/ordinance Section: Town Design Criteri	a and Construction Standards	
em	□ Site specific with Planning Board approval	□ Incentivized in code/ordinance	
'ste	☑ Expressly allowed by design/construction specifications	□ Typically not allowed	
Sy		Action: $\Box$ Leave as is $\square$ To be revised	
èr	Notes: Recommend inclusion with code/ordinance.		
17.Buffer Systems	Does the river or stream buffer include lakes, wetlands, and coastal w		
Bı	□ Supportive language in code/ordinance Section: Town Design Criteri		
17.	Site specific with Planning Board approval	□ Incentivized in code/ordinance	
	☑ Expressly allowed by design/construction specifications	□ Typically not allowed	
		Action: $\Box$ Leave as is $\square$ To be revised	
	Notes: Recommend inclusion with code/ordinance.		
	Does the ordinance require that the river or stream buffer remain in	its natural condition?	Score: 0 out of 4 points
	□ Supportive language in code/ordinance Section:		
	□ Site specific with Planning Board approval	□ Incentivized in code/ordinance	
	Expressly allowed by design/construction specifications	☑ Typically not allowed	
		Action: $\Box$ Leave as is $\square$ To be revised	
JCE	Notes:		
าลเ	Are uses in the buffer area defined by the ordinance?		
tei	□ Supportive language in code/ordinance Section:		
uin	□ Site specific with Planning Board approval	□ Incentivized in code/ordinance	
M	Expressly allowed by design/construction specifications	☑ Typically not allowed	
er ]		Action: $\Box$ Leave as is $\boxdot$ To be revised	
18. Buffer Maintenance	Notes:		
Bu			
8.	Does the ordinance specify enforcement or education mechanisms?		
1	□ Supportive language in code/ordinance Section:	T (* * 1 * 1 / 1*	
	□ Site specific with Planning Board approval	□ Incentivized in code/ordinance	
	□ Expressly allowed by design/construction specifications	$\square$ Typically not allowed	
		Action: $\Box$ Leave as is $\blacksquare$ To be revised	
	Notes:		

	Are there clearing and grading requirements that limit the amount of exposed soil at residential development sites to reduce the potential for erosion and sedimentation?	Score: 2 out of 3 points
36	☑ Supportive language in code/ordinance Section: <u>173-25 (B)</u> ☑ Site specific with Planning Board approval	
din	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
ira	$\Box \text{ Typically not allowed} \qquad \qquad Action: \ \Box \text{ Leave as is } \Box \text{ To be revised}$	
d G	Notes:	
ano		
19. Clearing and Grading	Do reserve septic field areas need to be cleared of trees at the time of construction?	
ear	☑ Supportive language in code/ordinance Section: <u>173-25 (B)</u> ☑ Site specific with Planning Board approval	
CI	□ Incentivized in code/ordinance □ Expressly allowed by design/construction specifications	
19.	$\Box \text{ Typically not allowed} \qquad \qquad Action: \Box \text{ Leave as is } \boxdot \text{ To be revised} \\ \text{Notes:} \qquad \qquad \\ \blacksquare \text{ Notes:} \qquad \qquad \\ \blacksquare \text{ Leave as is } \boxtimes \text{ To be revised} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ To be revised} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ To be revised} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ To be revised} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ To be revised} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ Leave as } \mathbb{E} \\ \blacksquare \text{ Leave as is } \boxtimes \text{ Leave as } \mathbb{E} \\ \blacksquare \text{ Leave as } E$	
	Notes.	
	Are certain trees or stands required to be preserved at residential development sites?	Score: 3 out of 3 points
	<ul> <li>✓ Supportive language in code/ordinance Section: <u>210-49 (B) 4, 210-39 (C), &amp; 210-3 (E)</u></li> <li>✓ Site specific with Planning Board approval</li> <li>□ Incentivized in code/ordinance</li> </ul>	
uc	□ Expressly allowed by design/construction specifications □ Typically not allowed	
atic	$Action: \square$ Leave as is $\square$ To be revised	
erv	Notes:	
onse		
20. Tree Conservation	Do construction plans provide adequate documentation to limit the clearing of natural vegetative cover?	
ree	$\square$ Supportive language in code/ordinance Section: <u>210-49 (B) 4, 210-39 (C), &amp; 210-3 (E)</u>	
E.	☑ Site specific with Planning Board approval □ Incentivized in code/ordinance	
20	□ Expressly allowed by design/construction specifications □ Typically not allowed	
	Notes: Action: $\square$ Leave as is $\square$ To be revised	
	Can developers or landowners utilize open space design, density bonuses, lower property tax rates, and other tools	Score: 4 out of 4 points
d ion	and programs?	
Lan Vat	<ul> <li>✓ Supportive language in code/ordinance Section: <u>Chapter 211: Incentive Zoning</u></li> <li>□ Site specific with Planning Board approval</li> <li>✓ Incentivized in code/ordinance</li> </ul>	
I. I iser cen	□ Site specific with Planning Board approval In code/ordinance In code/ordinance Typically not allowed	
21. Land Conservation Incentives	$ = Expressive answed by design/construction specifications $ $ Action: \square Typically not answed $ $ Action: \square Leave as is \square To be revised$	
	Notes:	

Code and Ordinances Worksheet Findings

tfalls	Is stormwater required to be treated ☑ Yes □ No Section: <u>Chapter 166-Ar</u> Notes:		Action: $\square$ Leave as is $\square$ To be revised	Score: 6 out of 6 points
ter Ou	□Yes ☑ No Section: <u>Chapter 166-Art</u> Notes:		Action: $\square$ Leave as is $\square$ To be revised	
Stormwater Outfalls	Are there effective design criteria for $\square$ Yes $\square$ No Section: <u>167-22</u> : (A), (B) Notes:	• stormwater best management practic <u>) (1) (2)</u> □ No Standard	es? Action: $\square$ Leave as is $\square$ To be revised	
	Does a floodplain management ordin	ance exist that restricts or prohibits de	evelopment within the 100-year	
22	floodplain? ☑Yes □ No Section: <u>Chapter 82: Flo</u> Notes:	od Damage Prevention	Action: $\square$ Leave as is $\square$ To be revised	
Areas identified within Conservation of Natural Areas that are most in-line with Green Infrastructure principles:				
	Buffer Systems and Conservation Incentives	✓ Tree Conservation ✓ Clearing and Grading	□ <b>Buffer Maintenance</b> ☑ Stormwater Outfalls	2

Total Score (out of 100): 59

Residential Streets and Parking Lots Score (out of 40): 17 Lot Development Score (out of 36): 23 Conservation of Natural Areas Score (out of 24): 19

Scoring (Out of 100 points)			
90 – 100:	Congratulations! Your community is a real leader in protecting streams, lakes, and estuaries. Keep up the good work!		
80 - 89:	80 – 89: Your local development rules are pretty good, but could use some tweaking in some areas.		

70 – 79:	Significant opportunities exist to improve your development rules. Consider creating a site planning roundtable.
60 - 69:	Development rules are inadequate to protect your local aquatic resources. A site planning roundtable would be very useful.
< 60:	Your development rules definitely are not environmentally friendly. Serious reform of the development rules is needed.

#### Summary of Green Infrastructure Sites

Qualitative Assessment Table

	Relative Assessment Scores (see Notes)							
GHD	Nutrient Removal	TSS Removal	Proximity to Impaired Water	Constructability/ Maintenance	Probable Construction Costs	Other Unique Benefits	Total	
Site	Practice							
Parma Town Hall	Bioswale (Water Qual Swale)	5	5	5	3	5	5	28
Parma Town Hall	Porous Paving	5	5	5	2	5	5	27
Parma Town Hall	Stabilization (Outlet)	1	5	5	5	5	5	26
Webster Town Hall	Stabilization (Bank)	5	5	3	2	5	5	25
Walworth Town Hall	Stormwater Wetlands	5	5	5	1	3	5	24
Churchville Village Hall	Rain garden (Filtration)	3	3	5	2	5	5	23
Webster Empire Blvd	Bioretention (Filtration)	5	5	1	4	5	3	23
LeRoy Mill Street Parking Lot	Bioretention (Filtration)	3	3	3	3	5	5	22
Spencerport Exempt Club	Rain garden (Filtration)	1	3	3	5	5	5	22
Ogden Maida Drive	Stormwater Wetlands	5	5	3	1	1	5	20
Parma Highway Garage	Bioretention (Filtration)	3	5	3	3	5	1	20
Penn Yan Spencer Street	Stabilization (Bank)	5	5	1	1	5	3	20
Walworth Laurel Court	Stabilization (Outlet)	1	5	5	3	5	1	20
Webster Finn Park	Stormwater Wetlands	5	5	3	1	3	3	20
Churchville DPW	Bioswale (Water Qual Swale)	1	3	5	3	5	1	18
Dresden Village Center	Rain garden (Filtration)	1	1	1	5	5	5	18
Leroy Elm Street	Bioretention (Filtration)	5	3	3	1	3	3	18
Penn Yan Lakeview Cemetery	Stormwater Wetlands	3	3	5	1	1	5	18
Walworth Highway Garage	Bioswale (Water Qual Swale)	1	5	1	5	5	1	18
Penn Yan Lake Street	Bioswale (Water Qual Swale)	3	3	1	4	5	1	17
Walworth Town Hall	Porous Paving	1	3	5	2	1	5	17
Torrey Highway Garage	Bioswale (Water Qual Swale)	1	3	1	5	5	1	16
Penn Yan Spencer Street	Stabilization (Outlet)	1	5	1	2	5	1	15
Webster Friar Tuck Lane	Stormwater Wetlands	3	3	3	1	1	3	14
Penn Yan Lake Street	Bioretention (Filtration)	1	1	1	4	5	1	13

Notes:

1. For description of criteria, see GHD Technical Memorandum dated September 2, 2011.

2. Scores: Low=1, Mod=3, High=5

3. Some variable of scores are present. High-Moderate = 4 & Moderate-Low = 2

4. Totals are relative to the projects included in this study.

Prepared by Genesee/Finger Lakes Regional Planning Council